

Specifications

Models	GS-2032		GS-2632		GS-3232	
Measurements	Metric	US	Metric	US	Metric	US
Working height maximum*	7.90 m	25 ft 11 in	9.80 m	32 ft 1 in	11.50 m	37 ft 8 in
A Platform height maximum w/load sense	5.90 m	19 ft 5 in	7.80 m	25 ft 6 in	9.50 m	31 ft 4 in
B Platform height stowed	1.03 m	3 ft 4.5 in	1.16 m	3 ft 9.5 in	1.29 m	4 ft 2.75 in
C Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
D Platform width - outside	81 cm	2 ft 8 in	81 cm	2 ft 8 in	81 cm	2 ft 8 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in
A Height - stowed: bolted rails	2.13 m	7 ft	2.26 m	7 ft 5 in	2.39 m	7 ft 10 in
rails folded	1.78 m	5 ft 9 in	1.91 m	6 ft 3 in	2.03 m	6 ft 8 in
Length - stowed	2.44 m	8 ft	2.44 m	8 ft	2.44 m	8 ft
F Length - extended	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in
G Width	81 cm	2 ft 8 in	81 cm	2 ft 8 in	81 cm	2 ft 8 in
H Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
A Ground clearance - center	9.5 cm	3.76 in	9.5 cm	3.76 in	9.5 cm	3.76 in
A - with pothole guards deployed	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in

Productivity

Maximum platform occupancy (in/out) ¹	2/1	2/1	2/-	2/-	2/-	2/-
Lift capacity	363 kg	800 lbs	227 kg	500 lbs	227 kg	500 lbs
Drive height	full height		full height		6.71 m	22 ft
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%		25%		25%	
Max outrigger levelling: front to back	_____	_____	_____	_____	3°	
Max outrigger levelling: side to side	_____	_____	_____	_____	5°	
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	2.13 m	7 ft	2.13 m	7 ft	2.13 m	7 ft
Raise / lower speed	30 / 34 sec	30 / 34 sec	30 / 40 sec	30 / 40 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

Power

Power source	24 V DC (four 6V 225 Ah batteries)	24 V DC (four 6V 225 Ah batteries)	24 V DC (four 6V 225 Ah batteries)
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L
			3.75 gal

Sound & Vibration Levels


Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

Weight***

	1,825 kg	4,024 lbs	1,956 kg	4,313 lbs	2,352 kg	5,185 lbs
--	----------	-----------	----------	-----------	----------	-----------

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2013); 2004/108/EC (EMC); 2006/95/EC (LVD)

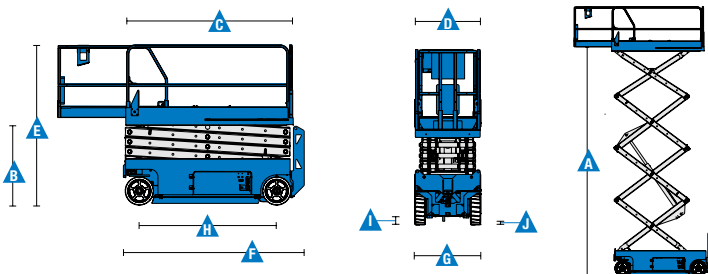

¹ Indoor use only for the GS-2632 and GS-3232
^{*} The metric equivalent of working height adds 2 m to platform height.
^{**} Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
^{***} Weight will vary depending on options and/or country standards.