


HTH

20.10

The HTH 20.10 telescopic handler is ideal for moving large, bulky loads in complete safety. Able to lift up to 20 tonnes, it is compatible with a wide range of accessories, making it extremely versatile. Equipped with an RFID system which provides automatic recognition of the various attachments used, this telescopic handler is able to meet a wide range of applications in heavy industry. Its four-wheel drive system, three manoeuvring modes and high ground clearance makes it highly manoeuvrable on all terrains.

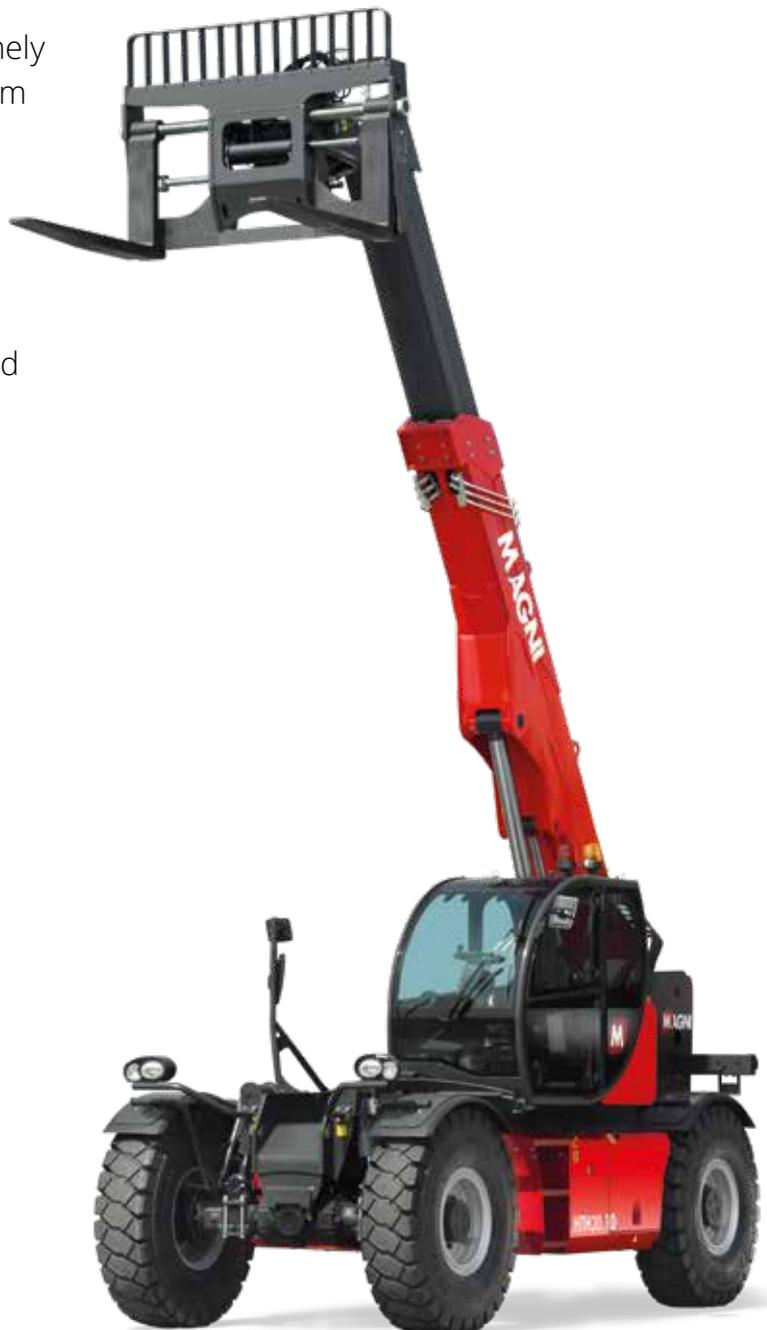

MAIN SECTORS



HEAVY
INDUSTRY



HEAVY
LOGISTICS



MINING &
QUARRING




SPECIAL
PROJECTS


HTH 20.10

Machine model	Maximum lifting capacity	19,999 kg
	Load center	600 mm
	Maximum lifting height	9.70 m
	Maximum reach	5.10 m
Engine	Type	Volvo TAD582 VE - Stage V Volvo TAD572 VE - Stage IV Volvo TAD552 VE Stage IIIA
	Rated power	160 kW (218 hp) @ 2,200 rpm
	Maximum torque	910 Nm @ 1,450 rpm
	Displacement	5,13 l
	Cylinders	4 in line
	Engine configuration	Turbocharged diesel direct injection common rail
	Cooling system	Water - intercooler
	Cab	FOPS-ROPS tested hermetic cab with protectors
Front, rear and upper wiper		•
Headlights for road circulation, flashing beacon		•
Rear view mirrors		•
Heating - Air conditioning		•
Controls	Multi-function electro proportional joystick	•
	Heavy Duty with epicyclic reduction	•
	One steering cylinders each axle	•
	Levelling correction front axle	+ 8° on the right and + 8° on the left
Axles And brakes	3 types of steering	- with front steering - with round steer - with crab steering
	Tilting rear axle	•
	Hydraulic servo-assisted multidisc brake in oil bath on both axles, with double circuit	•
	Negative parking brake	•
	Tyre size	16,00 - R25 ** two each axle, driving and steering
	Performance	Max. travel speed
Drawbar pull		156 kN
Gradeability		66%
Turning radius (at wheels)		5,729 mm
Weights	Total unladen	24,000 kg
	Front axle unladen (boom retracted and lowered)	8,000 kg
	Rear axle unladen (boom retracted and lowered)	16,000 kg
Transmission	Hydrostatics	Rexroth / Danfoss
	Variable displacement hydrostatic pump with electronic control	•
	Variable displacement hydrostatic motor	One
	Gearbox	Gearbox with 2 speeds forward / reverse
Hydraulic circuit	Load sensing piston pump	•
	Circuit at 350 bar	•
	Proportional hydraulic electrovalve	Bosch/Bucher
	Suction and return line filters	•
Tanks Capacities	High pressure flexible hoses	•
	Diesel fuel tank	270 l
	AdBlue*	40 l
	Hydraulic fluid	195 l
	Engine oil	16 l
Safety	Cooliant	40 l
	Electronic safety system which controls the load with definition of the lifted load, radius and comparison with the diagrams stored	•
	Block of aggravating movements of the load	•
	Safety valves on cylinders	•

HTH 20.10

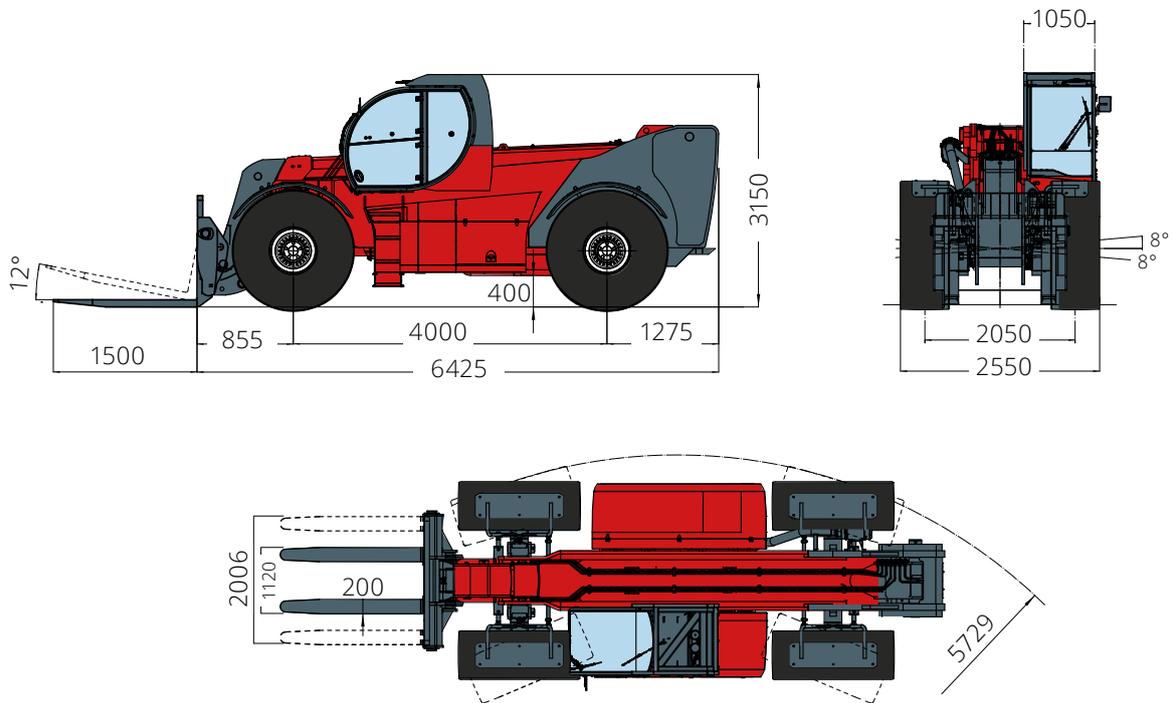

Load chart **with forks**

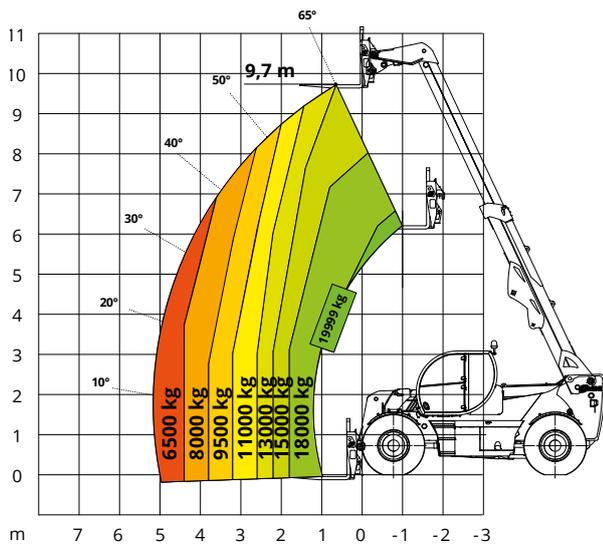

Load chart **with tyres clamp model TC 08.63**

