


# Material Lifts

## Superlift Contractor™

### Specifications

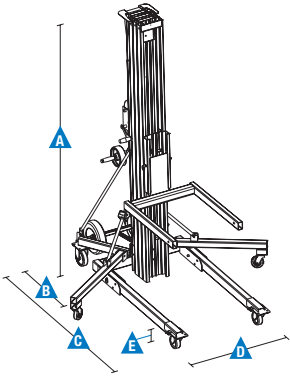

Models	SLC-12		SLC-18		SLC-24	
Measurements	Metric	US	Metric	US	Metric	US
Working height:						
standard forks - forks down	3.40 m	11 ft 2 in	5.10 m	16 ft 9 in	6.78 m	22 ft 3 in
standard forks - forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
adjustable forks - forks down	3.40 m	11 ft 2 in	5.10 m	16 ft 9 in	6.78 m	22 ft 3 in
adjustable forks - forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
boom*	3.70 m	12 ft 2 in	5.41 m	17 ft 9 in	7.10 m	23 ft 3 in
<b>A</b> Height - stowed	2.18 m	7 ft 2 in	2.18 m	7 ft 2 in	2.18 m	7 ft 2 in
<b>B</b> Length - stowed	86 cm	2 ft 10 in	86 cm	2 ft 10 in	86 cm	2 ft 10 in
<b>C</b> - operating	1.60 m	5 ft 3 in	1.85 m	6 ft 1 in	2.06 m	6 ft 9 in
<b>D</b> Width - stowed**	80 cm	2 ft 7.5 in	80 cm	2 ft 7.5 in	80 cm	2 ft 7.5 in
- with stabilizers lowered	1.68 m	5 ft 6 in	1.68 m	5 ft 6 in	1.68 m	5 ft 6 in

### Productivity

Load capacity:						
14 in (36 cm) load center	295 kg	650 lbs	295 kg	650 lbs	295 kg	650 lbs
24 in (61 cm) load center	193 kg	425 lbs	193 kg	425 lbs	193 kg	425 lbs
42 in (107 cm) load center	82 kg	180 lbs	73 kg	160 lbs	73 kg	160 lbs
<b>E</b> Ground clearance	5 cm	2 in	5 cm	2 in	5 cm	2 in
Load height minimum	15 cm	6 in	15 cm	6 in	15 cm	6 in
Front casters	10 cm	4 in	10 cm	4 in	10 cm	4 in
Rear casters	13 cm	5 in	13 cm	5 in	13 cm	5 in

### Power

Average cranks:						
standard winch	27.8 cranks/m8.5 cranks/ft		27.8 cranks/m8.5 cranks/ft		27.8 cranks/m8.5 cranks/ft	

### Weight

Standard	102 kg	225 lbs	139 kg	307 lbs	157 kg	347 lbs
----------	--------	---------	--------	---------	--------	---------

Standards Compliance EU Directive: 2006/42/EC (Machinery)

### Load Handling Attachments

Measurements	Metric	US	Weight - Metric	Weight - US
Standard forks (l/w/d)***	71/58/6 cm	28/23/2.5 in	12 kg	26.5 lbs
Adjustable forks (l/w/d)***	70/30-76/6 cm	27.5/12-30/2.5 in	24 kg	52.5 lbs
Fork extensions detached (each) (l/w/d)***	76/5/8 cm	30/2/3 in	2 kg	4.5 lbs
Fork extensions attached (each) (l/w/d)***	64/5/8 cm	25/2/3 in	2 kg	4.5 lbs
Boom (l/w/d)***	46-107/4/15 cm	18-42/1.5/6 in	18 kg	39.9 lbs
Load platform (l/w/d)***	67/58/6 cm	26.3/23/2.5 in	14 kg	31.5 lbs

\* Measured from ground to bottom of shackle.  
\*\* Outside dimensions.  
\*\*\* Length/Width/Depth.

### Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

#### Measurements

##### SLC™-12

- 3.94 m (12 ft 11 in) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

##### SLC-18

- 5.64 m (18 ft 6 in) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

##### SLC-24

- 7.32 m (24 ft) maximum lifting height
- Up to 295 kg (650 lbs) lift capacity

#### Productivity

- Heavy-duty design
- Strong, lightweight aluminum telescoping mast with mast brake
- Quick set up requires no tools
- Interchangeable load handling attachments
- Rear transport wheel assembly
- Glide rails allow easy loading and unloading, on or off a vehicle, for transport
- Hold-down bar secures mast assembly during transport

#### Power

- One speed manual winch

#### Productivity & Fork Options

- Standard forks
- Adjustable forks
- Fork extensions
- Boom
- Pipe cradle<sup>(1)</sup>
- Load platform

#### Power Options

- One speed manual winch (standard)
- Two speed manual winch<sup>(1)</sup>

#### Base Options

- Standard base
- Standard mast brake
- Stabilizer set (standard on SLC-18, -24)

#### Wheels & Casters

- Non-marking 10 cm (4 in) front casters (standard)
- Non-marking 13 cm (5 in) rear casters (standard)
- Side brakes (standard)

#### Productivity

- Adjustable forks
- Fork extensions
- Boom
- Pipe cradle<sup>(1)</sup>
- Load platform
- Stabilizer set (option on SLC-12)

#### Power

- Two speed manual winch<sup>(1)</sup>



<sup>(1)</sup> Available aftermarket only

#### United Kingdom and MESART

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com  
 Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381, Email AWP-InfoME@terex.com  
 Visit [www.genielift.com/en-gb/about-genie/locations](http://www.genielift.com/en-gb/about-genie/locations) to view our global locations list.

#### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2019 Terex Corporation.

