


RUTHMANN
professionals at work

STEIGER® T 285






RUTHMANNSTEIGER® T 285 Simply Unbeatable!

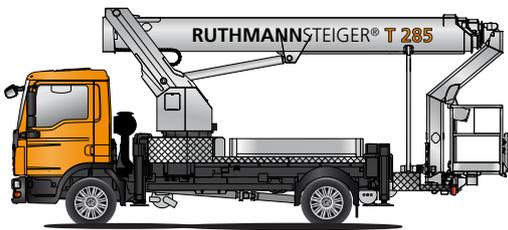

- 28.5 metre working height
- 21.1 metre lateral outreach at 100 kg cage load
- versatile boom technology made from high-strength, fine-grained steel
- rigid turret that remains within the contours of the vehicle when pivoting
- fully variable horizontal/vertical jacking mechanism made of solid steel
- large 1.7m X 0.86m working cage
- sturdy, hydraulic 2 X 90° cage rotation device
- 185° jib (RÜSSEL®) swivelling range
- 320 kg cage capacity
- information/diagnostic display also in working cage
- and so much more

For further information visit: www.ruthmann.de/t285en

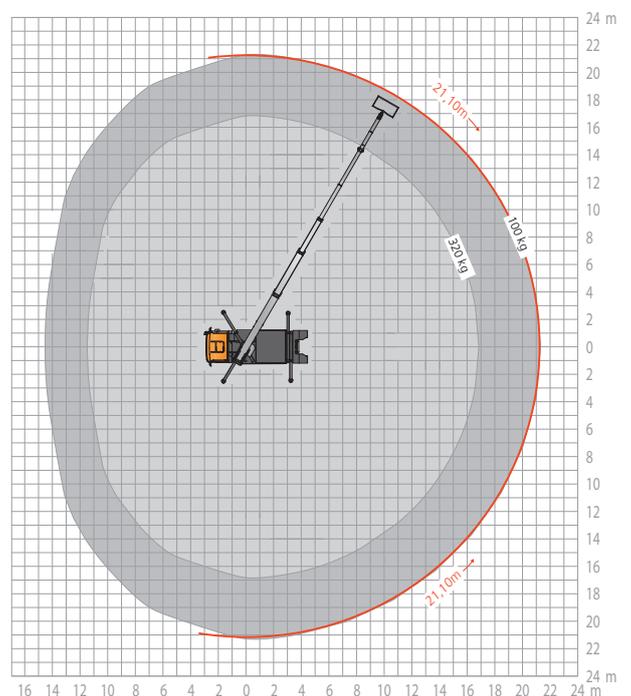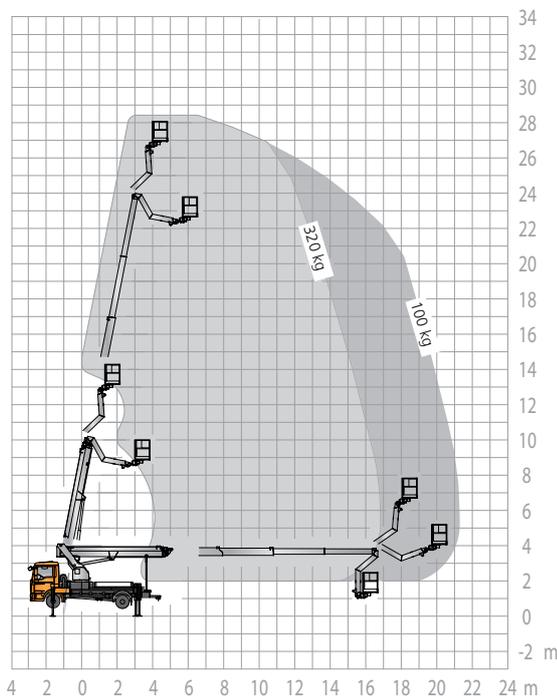



RUTHMANN
professionals at work

STEIGER® T 285

Our STEIGER® T 285 combines maximum performance data with compact vehicle dimensions. It can be mounted on a variety of different chassis from 7.49t and up.

The 28.5-metre working height and 21.1-metre lateral outreach, offer enormous advantages. Rental companies, gardeners, landscapers, industrial cleaners, craftsmen, etc. will find this particular model especially interesting.

The T 285 is easy to handle. The rigid turret, which always remains within the contours of the vehicle when pivoting, functions independently without any additional hydraulic mechanisms. Low maintenance is assured.

As with the T 330, the versatile boom system made of high-strength, fine-grained steel is the integral part of the STEIGER® T 285. State-of-the-art technology provides the T 285 with maximum stability and functionality.

The RUTHMANNSTEIGER® T 285 not only scores points

with impressive performance data but also with its compact overall dimensions. The total vehicle length is only 8.19 metres and the wheelbase is a short 3.9 metres.

The same time-tested working cage concept so popular on the RUTHMANNSTEIGER® T 330, can also be found on the T 285. The cage offers a lot of room, unrestricted mobility and has a carrying capacity of 320 kg. There is plenty of room for 3 people with tools and equipment. The standard cleaning port and tool tray are very practical in everyday situations. The sturdy hydraulic cage-rotation device and 185° swivelling angle of the jib (RÜSSEL®) provide a high degree of mobility and versatility.

The jacking concept of the T 285 is extremely practical. Technical improvements have been made to the horizontal/vertical jacking mechanism. It now has a fully dynamic automatic adaption feature. Depending on the jacking position of the respective

jack, RUTHMANN's state-of-the-art electronic-control system is able to allocate the maximum operating range. Easy and safe positioning and operation of the aerial platform at the jobsite are assured, even when work needs to be carried out in the most difficult and cramped conditions. The STEIGER®

T 285 can even carry out assignments on sloped surfaces of up to 5°.

Please contact us by phone, fax, or email. We would be happy to provide you with detailed information about the range of services, advantages, and uses of our time-tested STEIGER® models.



RUTHMANNSTEIGER®		T 285				
	Working height	28,50 m		Total length ≥	8,19 m	
	Lifting height	26,50 m		perm. siting inclination	5°**	
	Lateral outreach	21,10 m*		Perm. total weight ≥	7.490 kg	
	Working cage size	1,70 x 0,86 m		Range of rotation	500°	
	Working cage capacity	320 kg		Swivelling angle of the jib	185°	
	Overall height ≥	3,56 m		Driving Licence	C1 / 3	
* depending on load, angle of rotation and outfit					Wheelbase carrier chassis ≥	3,90 m
** with restriction of performance data						

All measurements and weights are approximate and refer to the standard basic execution. Technical alterations reserved. STEIGER®, GELENKSTEIGER®, RÜSSEL®, FLEXILOADER® and CARGOLOADER® are registered trademarks of RUTHMANN GmbH & Co. KG

RUTHMANN GmbH & Co. KG
P.O. Box 1263 - 48705 Gescher-Hochmoor - GERMANY
Fon: +49 28 63 204-0 - Fax: +49 28 63 204-212
Internet: www.ruthmann.de - E-Mail: export@ruthmann.de

Valid from: 08/2011 Produktdatenblatt_T285.indd